

ID Top (RFID Only)

9982191 | 9982205 | 9982213



The iD Top is an integrated RFID reader that can easily be mounted on the ceiling - using nice-looking steel cables, pole system or flush mount. Its compact, clean design blends into every store, keeping the entrance of the store open. The iD Top can be combined with overhead customer counting and existing (AM/RF) EAS systems. Multiple iD Tops can be linked together to cover large entrances.

The RFID-based EAS overhead iD Top ensures an easier and more cost-effective installation, since no major structure work is needed; the rfid overhead can be installed above false ceilings, with a VESA-mount, hanging on steel cables or directly attached to the ceiling, which makes it easy to move them to another location whenever the store design changes.


- State-of-the-art reader and antenna design, ensuring optimal read performance, even in challenging environments.
- Dynamic Beam Steering technology ensures optimal stray tag filtering in retail situations and enables direction detection.
- Automatic Tag Muting ensures optimal performance, even at locations with a large number of stray tags.
- Simple to install and easy to configure; Device Management allows remote monitoring, remote log-in and online firmware update.
- Standard light and audio signalisation present.
- API with SDK available that can be used for system integration, providing autonomous operation and buffered reads.

Options

- Device Management: remote monitoring, remote log-in and online firmware updates.
- Steel cable set 9.8 ft. (3 m) for ceiling mount.

Technical specifications

Air interface protocol	EPCglobal UHF Class 1 Gen 2 / ISO 18000-6C
Supported regions	Region 1, Region 2, Region 3
Radiated power	Europe (ETSI EN 302 208): 2W eirp United States (FCC Part 15.247): 4W eirp Canada (RSS210): 4W eirp
Antenna type	Quad-patch circularly polarised with Dynamic Beam Steering
Connectivity	Ethernet, USB (service port only)
Management interfaces	Local configuration interface Nedap Device Management with: <ul style="list-style-type: none">• Remote monitoring• Remote log-in• Online firmware-u SNMP version 2c
Dimensions	1.2ft x 1.2ft x 3.2" 372 mm x 372 mm x 81 mm
Weight	11 lbs 5 kg
Mains	100 - 240V
Operating temp.	32 .. 104°F 0 .. 40°C
Mounting	<ul style="list-style-type: none">• Ceiling mounted (using steel• Cables or VESA mount)• Wall mounted (using included• Mounting plate or VESA mount)

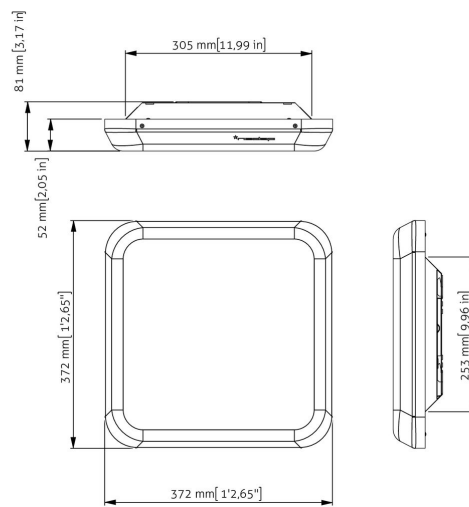

Ordering information

Description	Article number
ASSY OV37R RFID R1 WHITE	9982191
ASSY OV37R RFID R2 WHITE	9982205
ASSY OV37R RFID R3 WHITE	9982213